


VF

Vite per calcestruzzo Concrete screw





Vite testa cilindrica
Zincata bianca
Impronta Torx T15 - Ø5
Impronta Torx T30 - Ø7,5

Cylindrical head
White zinc plated
Torx T15 recess - Ø5
Torx T30 recess - Ø7,5



Vite TPS
Zincata bianca
Impronta Torx T30

Countersunk head
White zinc plated
Torx T30 recess

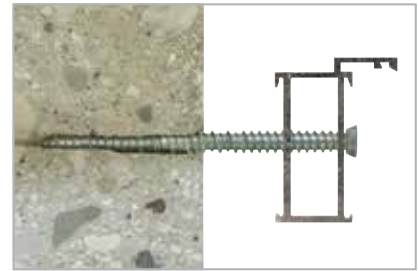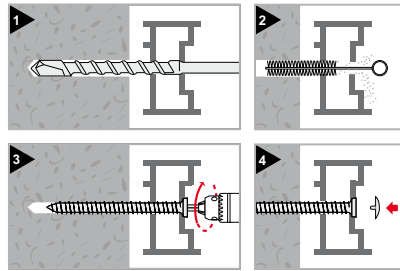

Cod.*	Dim. Ø x L	Testa Head Ø	Foro Hole Ø	Sp. fissabile Fixing thickness max ⁽¹⁾	Conf. Pkg.	Imballo Outerbox
19418b05060	5x62	5	4	30	100	1200
19418b05080	5x82	5	4	50	100	1200
19418b05110	5x112	5	4	80	100	600
19418b07060	7,5x60	8,5	6	30	100	800
19418b07070	7,5x70	8,5	6	40	100	800
19418b07080	7,5x80	8,5	6	50	100	800
19418b07090	7,5x90	8,5	6	60	100	800
19418b07100	7,5x100	8,5	6	70	100	800
19418b07120	7,5x120	8,5	6	90	100	600
19418b07135	7,5x135	8,5	6	105	100	600
19418b07150	7,5x150	8,5	6	120	100	600
19418b07180	7,5x180	8,5	6	150	100	400
19418b07210	7,5x210	8,5	6	180	50	200
19418b07240	7,5x240	8,5	6	210	50	-

⁽¹⁾ Spessore max fissabile riferito a posa sul calcestruzzo / Max fixing thickness refers to installation on concrete

* Non certificato CE / Not covered by CE certification



Cod.	Dim. Ø x L	Testa Head Ø	Foro Hole Ø	Sp. fissabile Fixing thickness max ⁽¹⁾	Conf. Pkg.	Imballo Outerbox
19419b07040	7,5x40	11,5	6	10	100	1200
19419b07060	7,5x60	11,5	6	30	100	800
19419b07070	7,5x70	11,5	6	40	100	800
19419b07080	7,5x80	11,5	6	50	100	800
19419b07090	7,5x90	11,5	6	60	100	800
19419b07100	7,5x100	11,5	6	70	100	800
19419b07120	7,5x120	11,5	6	90	100	600
19419b07135	7,5x135	11,5	6	105	100	600
19419b07150	7,5x150	11,5	6	120	100	600
19419b07180	7,5x180	11,5	6	150	100	400
19419b07210*	7,5x210	11,5	6	180	50	200
19419b07240*	7,5x240	11,5	6	210	50	-

⁽¹⁾ Spessore max fissabile riferito a posa sul calcestruzzo / Max fixing thickness refers to installation on concrete

* Non certificato CE / Not covered by CE certification

CONSIGLI PER GLI ACQUISTI - WE ALSO RECOMMEND



INS | p. 298



CAP | p. 98



CAP | p. 98

